

# FabricAir® AntiStat



## ANTISTATIC

The fabric is antistatic.



## WASHABLE

The fabric is washable as well as oil and water repellent and ensures top-grade hygiene and a healthy indoor climate at the same time.



## PRICE INDEX: C


Indicates the price level compared to our other fabrics.

A: Most expensive.  
L: Least expensive.

Electric charges may build up around moving air. Wherever static electricity is a problem, FabricAir® AntiStat prevents static electricity build-up. FabricAir® AntiStat is an ideal solution for clean-room environments, the electronic industry, semi-conductors, switching stations, micromechanics, optics, biotechnology, the pharmaceutical and medicinal industries and other sensitive applications.

The fabric's composition of different fibres, including fibres with an electrically conductive carbon core, ensures excellent antistatic properties enabling FabricAir® AntiStat to conduct any electrical charges away from the room with or without an earthed connection from the duct.

FabricAir® AntiStat is available with either MeshFlow™ or NozzFlow™.

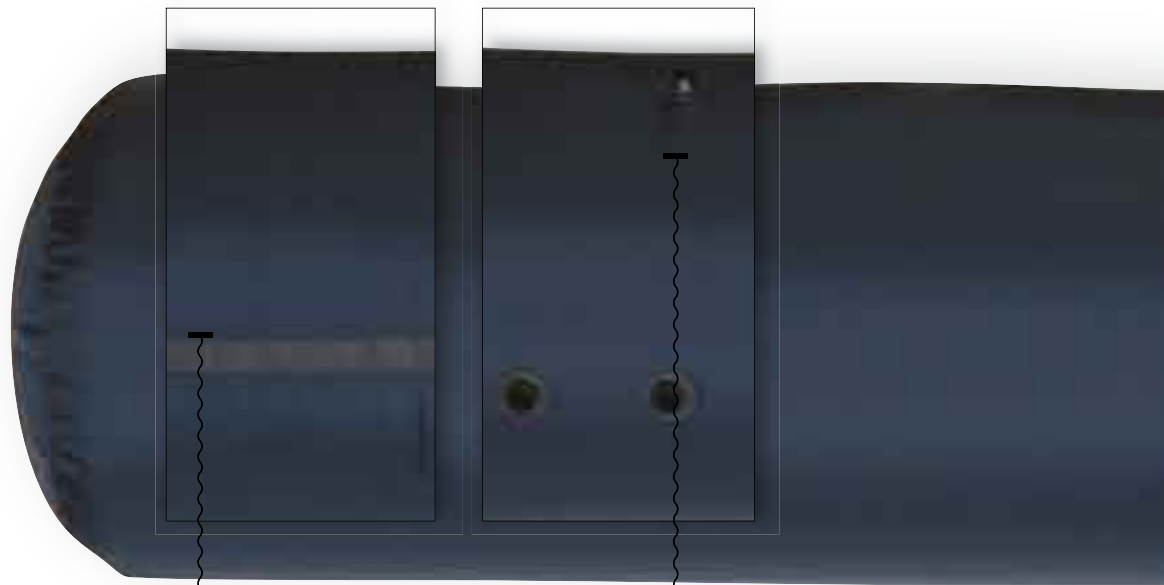

## MeshFlow™

Air supplied through side vents.



## NozzFlow™


Air supplied through precise air-directional nozzles.

## STANDARD FLOW MODELS

See the flow-model selection guide on page 28.



## STANDARD DUCT PROFILES



## STANDARD FABRIC COLOURS

White 9250	Azure Blue 9251	Olive Green 9252	Navy Blue 9253	Grey 9254	Water Blue 9255

## STANDARD ACCESSORY COLOURS

Accessory colours are pre-selected according to the standard shown. Alternative preferences must be stated separately.

	White 9250	Azure Blue 9251	Olive Green 9252	Navy Blue 9253	Grey 9254	Water Blue 9255
Nozzles (NozzFlow™)						
Sliders						
Hooks						
Mesh (MeshFlow™)						

The colours shown here are only intended as a guide. Please contact FabricAir® for exact colour samples.



### ZIPS

Sections are joined using heavy-duty industrial zips discreetly concealed beneath an extra seam.



### TAG NUMBER

Each duct section is labelled with a tag number to indicate the installation sequence. The tag also includes an ID number to facilitate tracing.

### SECURE ATTACHMENT

The fabric ducts are attached to the metal joint using a hard-wearing pinch-down duct belt.