


SUSPENSIONS

Introduction to **Type 07 HE**


Single Suspended Fixed H-Rail For Harsh Environments

- Perfect for harsh environments
- Stable installation
- Great for larger diameters with retention system

Click or Scan






Click or Scan






The H-rail, so named because it looks like an H in the cross section, is made of anodized aluminium. All the load bearing elements in the HE suspension system are hot-dip galvanized (HDG) ensuring a high level of protection against corrosion.

Example of duct system configuration

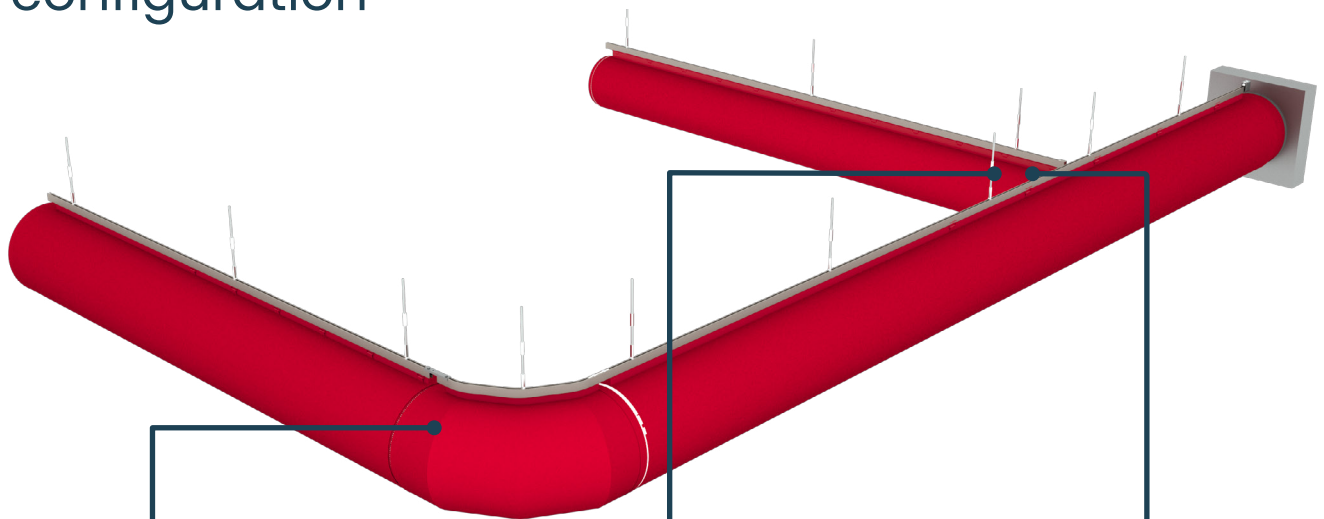




Elbows

We provide custom elbows in any degree and size.



Reductions

Concentric and eccentric reducers are available.




Branches

Concentric and eccentric branch take-offs are available.

H-RAIL for Type 07 HE

While assembling the suspension system, the hot-dip galvanized (HDG) M8 threaded rods ensure strong, fast and practical installation. The HDG threaded rods come in 2 m (6'5" ft) length. If the drop between ceiling and H-rail is longer than 2 m (6'5" ft), it can be easily extended by joining two HDG threaded rods together by a HDG coupling nut. The HDG M8 rod is connected to H-rail using a HDG bolt, which can easily slide over the H-rail and be fastened at required position using HDG nut and washer. The suspension rails are extended by joining two H-rails together by a HDG connector with set screws. The duct will have sliders or a bulb edge to slide into the H-rail at the appropriate locations for both single and double H-rail configurations. The H-rails are bent to the exact angle that is needed to suit the elbows in your FabricAir duct system.

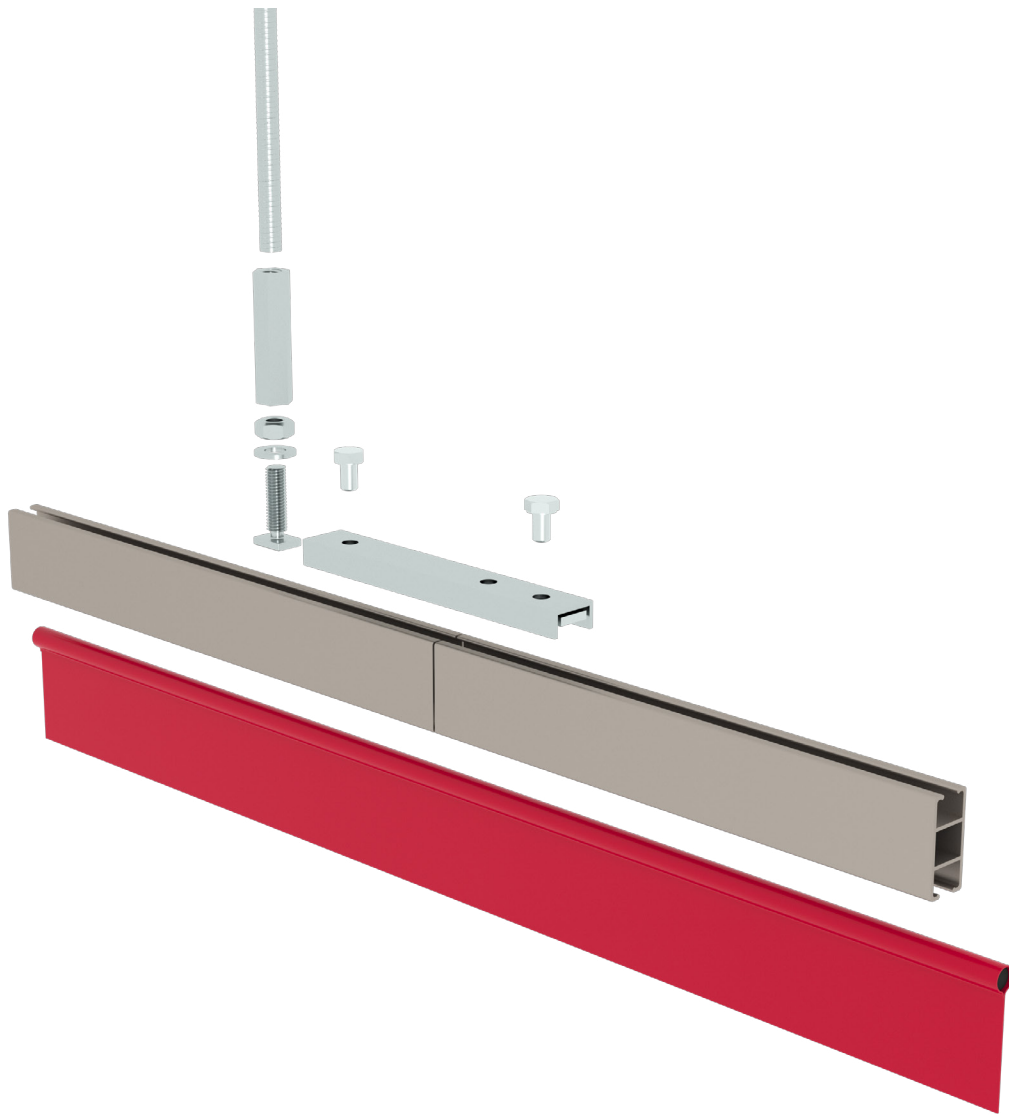

fabricair.com/contacts

All rights reserved to FabricAir®, 2022. The latest version can be downloaded from fabricair.com. We are not responsible for printing errors.

FA-IG-T07HE-220629

