

FABRICAIR TREVIRA BASIC

FabricAir Trevira

FabricAir® Trevira is a permeable fabric woven with permanently flame-retardant fibers and yarns. It is especially suitable in places where there is a risk of bacteria growth or condensation, such as the food industry or indoor pools.

FabricAir® Trevira is supplied with a 5- or 10-year warranty and all variants are Oeko-Tex 100 certified.

All suspension types are available, including All-in-One, which always keeps the duct stretched out even when the air is removed from the system.

FabricAir® Trevira is machine washable and retains its dimensions after washing (max. 0.5% shrinkage). The permeability is uniform (max. 5% variation).

The fabric is supplied in standard colors, with the option of custom dye, surface prints and other custom prints.

FEATURES

- ✓ Permeable
- ✓ The hygienic alternative to metal
- ✓ Inherently flame retardant fibers
- ✓ LEED points
- ✓ Oeko-Tex Standard 100
- ✓ All-in-One Support
- ✓ Internal 360° Hoops

STANDARD COLORS

White
1000


Blue
1001

Orange
1002

Gray
1003

Black
1004

Red
1005

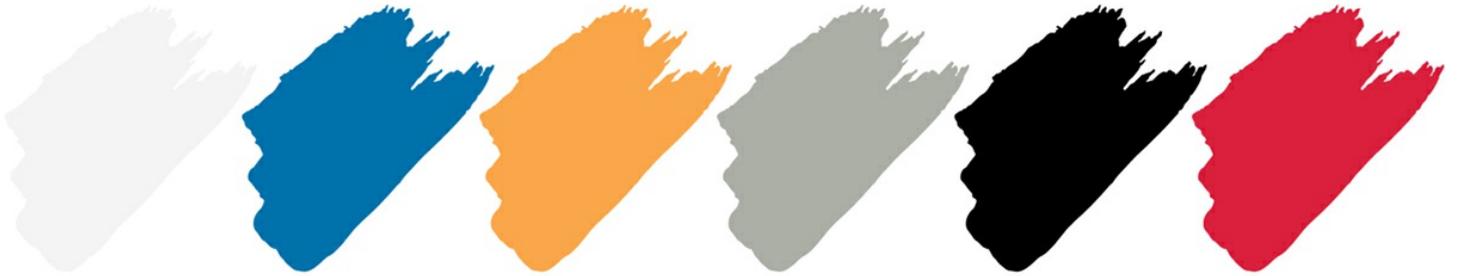

DYE COLOR

SURFACE PRINT

GRAPHIC PRINT

FabricAir Trevira
Basic, CS 100 and CS 150

Dye

Coloring

Seamless
Patterns

Artwork

Logos

Lettering



FabricAir® Trevira Basic comes with a 5 year warranty.

PROFILES



ROUND



D-SHAPED / HALF-
ROUND

FabricAir round duct is the



CIRCLE SECTION

The Circle Section duct can be used when there is a hard ceiling to attach to. Typically this profile is



**FABRICAIR®
VARIODUCT™**



RECTANGULAR



INTERNAL 360° HOOPS

Internal 360° Hoops




ALL-IN-ONE SUPPORT

FLOW MODELS




FABFLOW™

In FabFlow™ the air exits the duct through the permeable fabric surface. The air is driven by

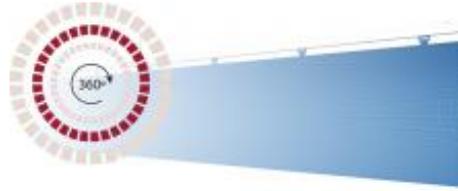


MICROFLOW™

With MicroFlow™ the air exits the duct via laser cut micro-perforations along the circumference of the

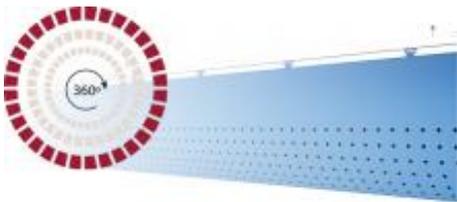


PERFOFLOW™

With PerfoFlow™ the air exits the duct via laser cut perforations along the circumference of the duct.

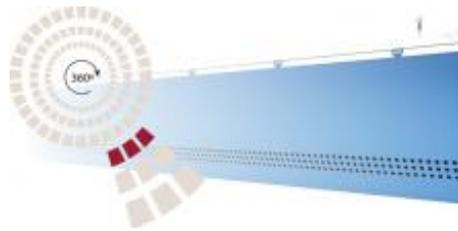


SONICFLOW™

SonicFlow™ is a directional flow model where the air exits the duct via rows of laser cut

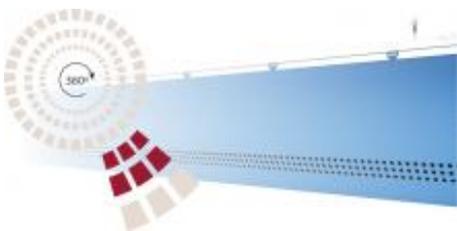

ORIFLOW™

OriFlow™ is a directional flow model where the air exits the duct via rows of laser cut orifices. Multiple

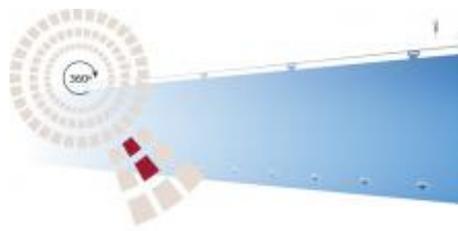

NOZZFLOW™

NozzFlow™ is used in applications where very precise directional airflow is needed. The discharge



■ JETFLOW™

JetFlow™ is capable of generating exceptionally long throws through the use of conical jets in

DATA SHEET

CONSTRUCTION

Fabric type:	Polyester/Trevira CS	
Weight	245 g/m ² 7.25 oz/yd ²	<u>EN ISO 12127:1997 (ASTM D3776-96)</u>
Thickness:	0,34 [0.13] mm [inch]	<u>EN ISO 5084:1996 (ASTM D1777-96)</u>
Permeability:	40/200/320/650/1200 (±5%) m ³ /m ² /h at 120 Pa 2/10/16/33/60 (±5%) [CFM/ft ² at 0.5" Static]	<u>EN ISO 9237:1995 (ASTM D737, Frazier)</u>

PROPERTIES

Strength - Warp:	1350 N	<u>EN ISO 13934-1</u>
Strength - Weft:	1550 N	<u>EN ISO 13934-1</u>
Shrinkage:	0,5 % Max. °C [°F]	<u>EN ISO 5077</u>
Heat resistance - continuous:	80 [176] °C [°F]	
Heat resistance - softening:	120 [248] °C [°F]	

TREATMENT/COATINGS

CODE COMPLIANCE

UL 723:	Yes	<u>UL 723</u>
Fire retardant:	M1	<u>NF P 92-507</u>

PERFORMANCE CERTIFICATES

ADDITIONAL APPROVALS

OEKO-TEX®:	Approved	<u>OEKO-TEX® Standard 100</u>
All-in-One available:	<u>Yes</u>	

Disclaimer

FabricAir® believes that all data, statements, technical information, etc., listed in this Technical Data Sheet regarding the product and the use of the product are accurate and reliable. However, the product will only be covered by FabricAir®'s guarantees or warranty if

the final use for the product has been approved by FabricAir® in writing. No representative is authorized to approve the final use of the product on behalf of FabricAir®.

VARIATIONS OF THE FABRIC

Trevira CS

	Permeable	Flame Retardancy	Antistatic	Anti-microbial	Warranty
<u>Trevira Basic</u>	✓				<u>5</u>
<u>Trevira CS 100</u>	✓	<u>Permanent</u>			<u>10</u>
<u>Trevira CS 150</u>	✓	<u>Permanent</u>		✓	<u>10</u>

[[Compare selection](#)]

CERTIFICATE COMPARISON

COMPARE CERTIFICATES FOR FABRICAIR TREVIRA CS

	<u>Trevira Basic</u>	<u>Trevira CS 100</u>	<u>Trevira CS 150</u>
EN 13501-1		B-s1, d0	B-s1, d0
UL 723	Yes	Yes	Yes
ULC S102.2			Yes
NFP 92-507	M1	M1	M1
UL 2518			Yes
Oeko-Tex Standard 100	Approved	Approved	Goedgekeurd

RELATED ARTICLES



COLORS AND SPECIAL DYING

FabricAir ducts are available in a variety of standard colors and custom colors upon request.



SHRINKAGE IS LESS THAN 0.5%

Duct shrinkage can be a serious problem if uncorrected. Suppose you take down a duct to wash it and afterwards it is two feet shorter and two inches smaller in diameter.



| LAUNDERING

The ability to launder FabricAir ducts is one of the many unique advantages of selecting fabric over metal ducting.
