


SUSPENSIONS

Introduction to **Type 11/11A** Double T-Rail Flush Mount for D Ducts

- Quick and easy installation for flat ceilings
- Inexpensive

Click or Scan




Animation

Click or Scan





Drawings

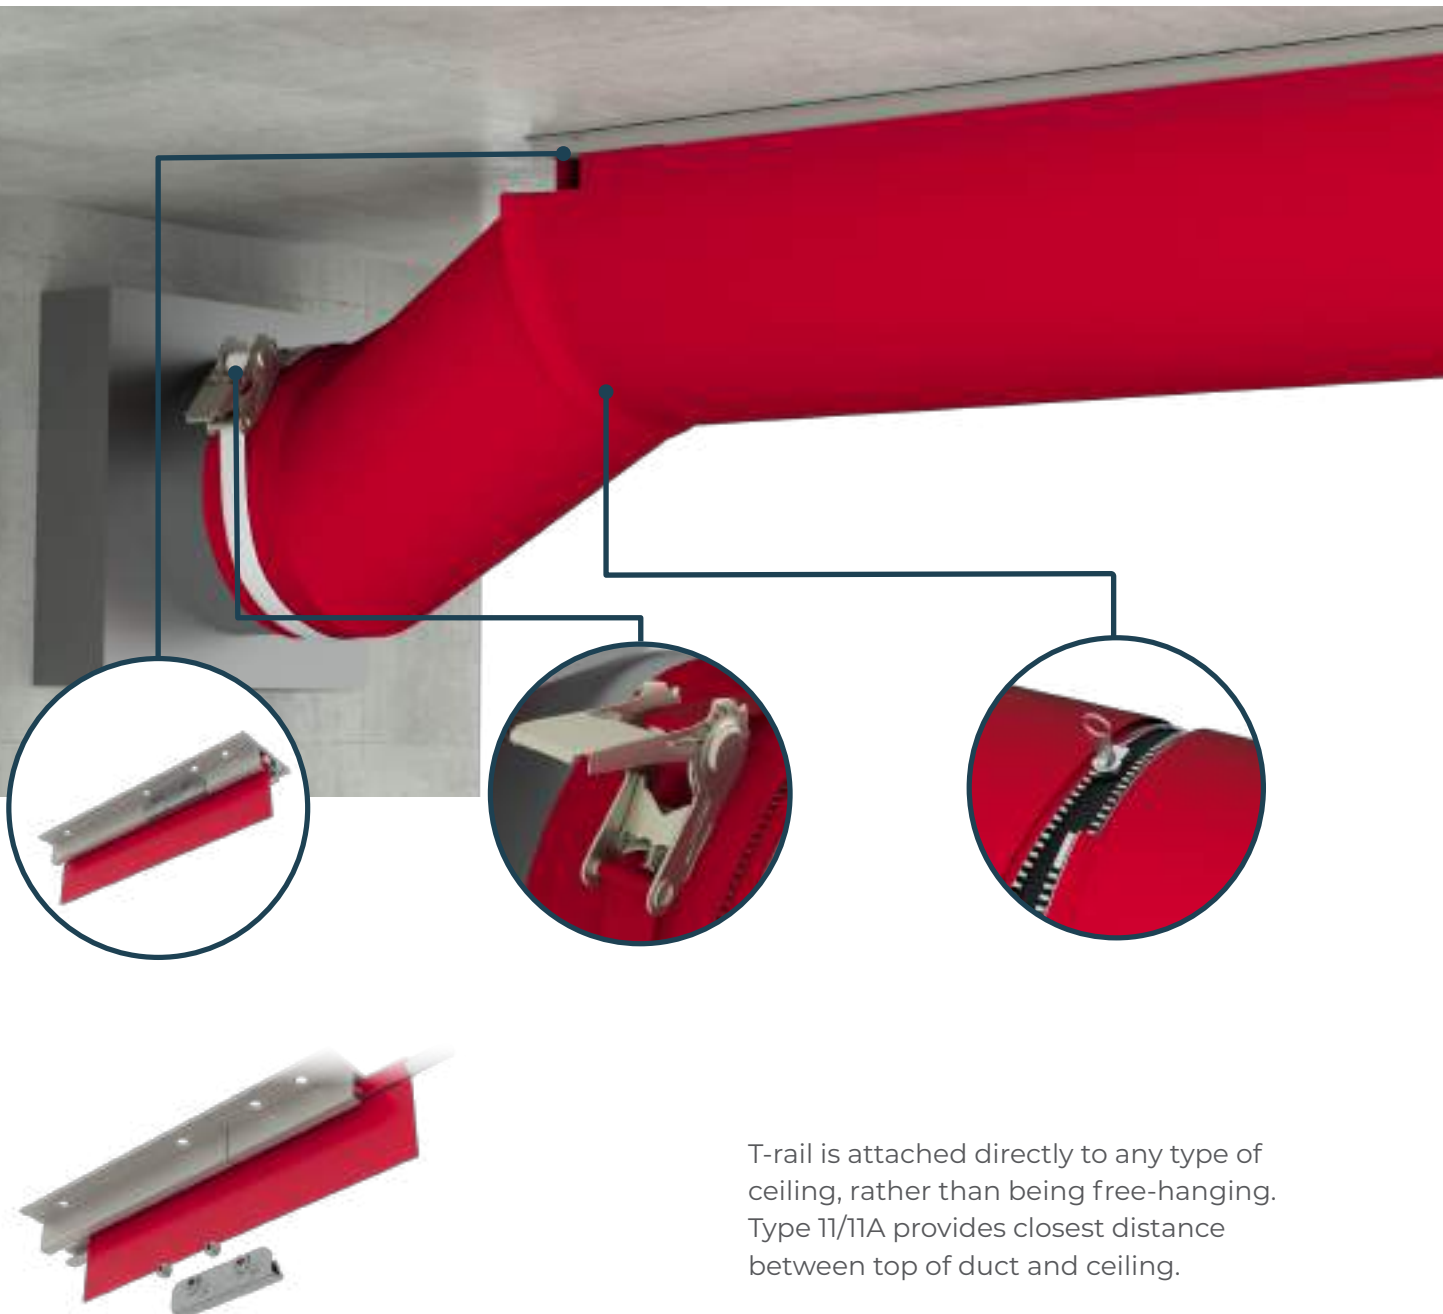


T-rail is attached directly to any type of ceiling, rather than being free-hanging. Type 11/11A provides closest distance between top of duct and ceiling.

Example of duct system configuration

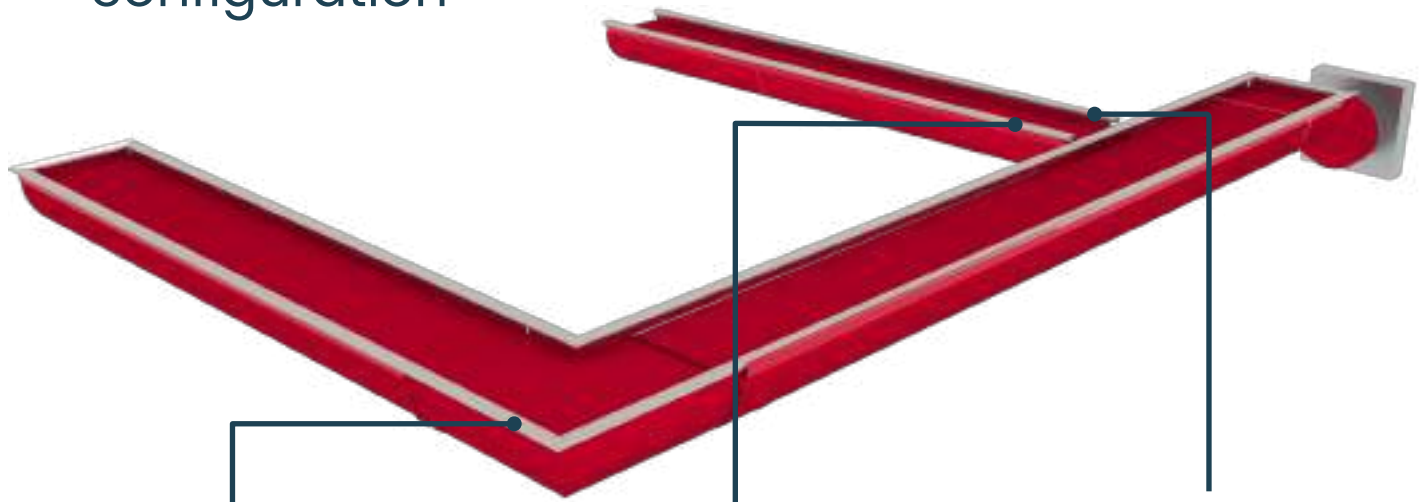

Elbows

We provide custom elbows in any degree and size.



Reductions

Concentric and eccentric reducers are available.





Branches

Concentric and eccentric branch take-offs are available.

Options available for Type 11/11A

T-RAIL for Type 11/11A

T-rail is produced in 2 meter sections using an extrusion process and then anodized, making it an excellent choice for corrosive environments. T-rail is primarily used in a two rail configuration to suspend D-shaped and semi-oval ducts, although it can also be used to mount a round ducts. The duct will have a soft bulb edge or keder, to slide the channel in the T-rail at the appropriate locations for both single and double T-rail configurations.



fabricair.com/contacts

All rights reserved to FabricAir®, 2022. The latest version can be downloaded from fabricair.com. We are not responsible for printing errors.

FA-IG-T11-220303

