


SUSPENSIONS

Introduction to **Type 05** Single Suspended Fixed H-Rail


- Aesthetically pleasing installation
- Stable installation
- Great for larger diameters with retention system

Click or Scan




Animation

Click or Scan






Drawings

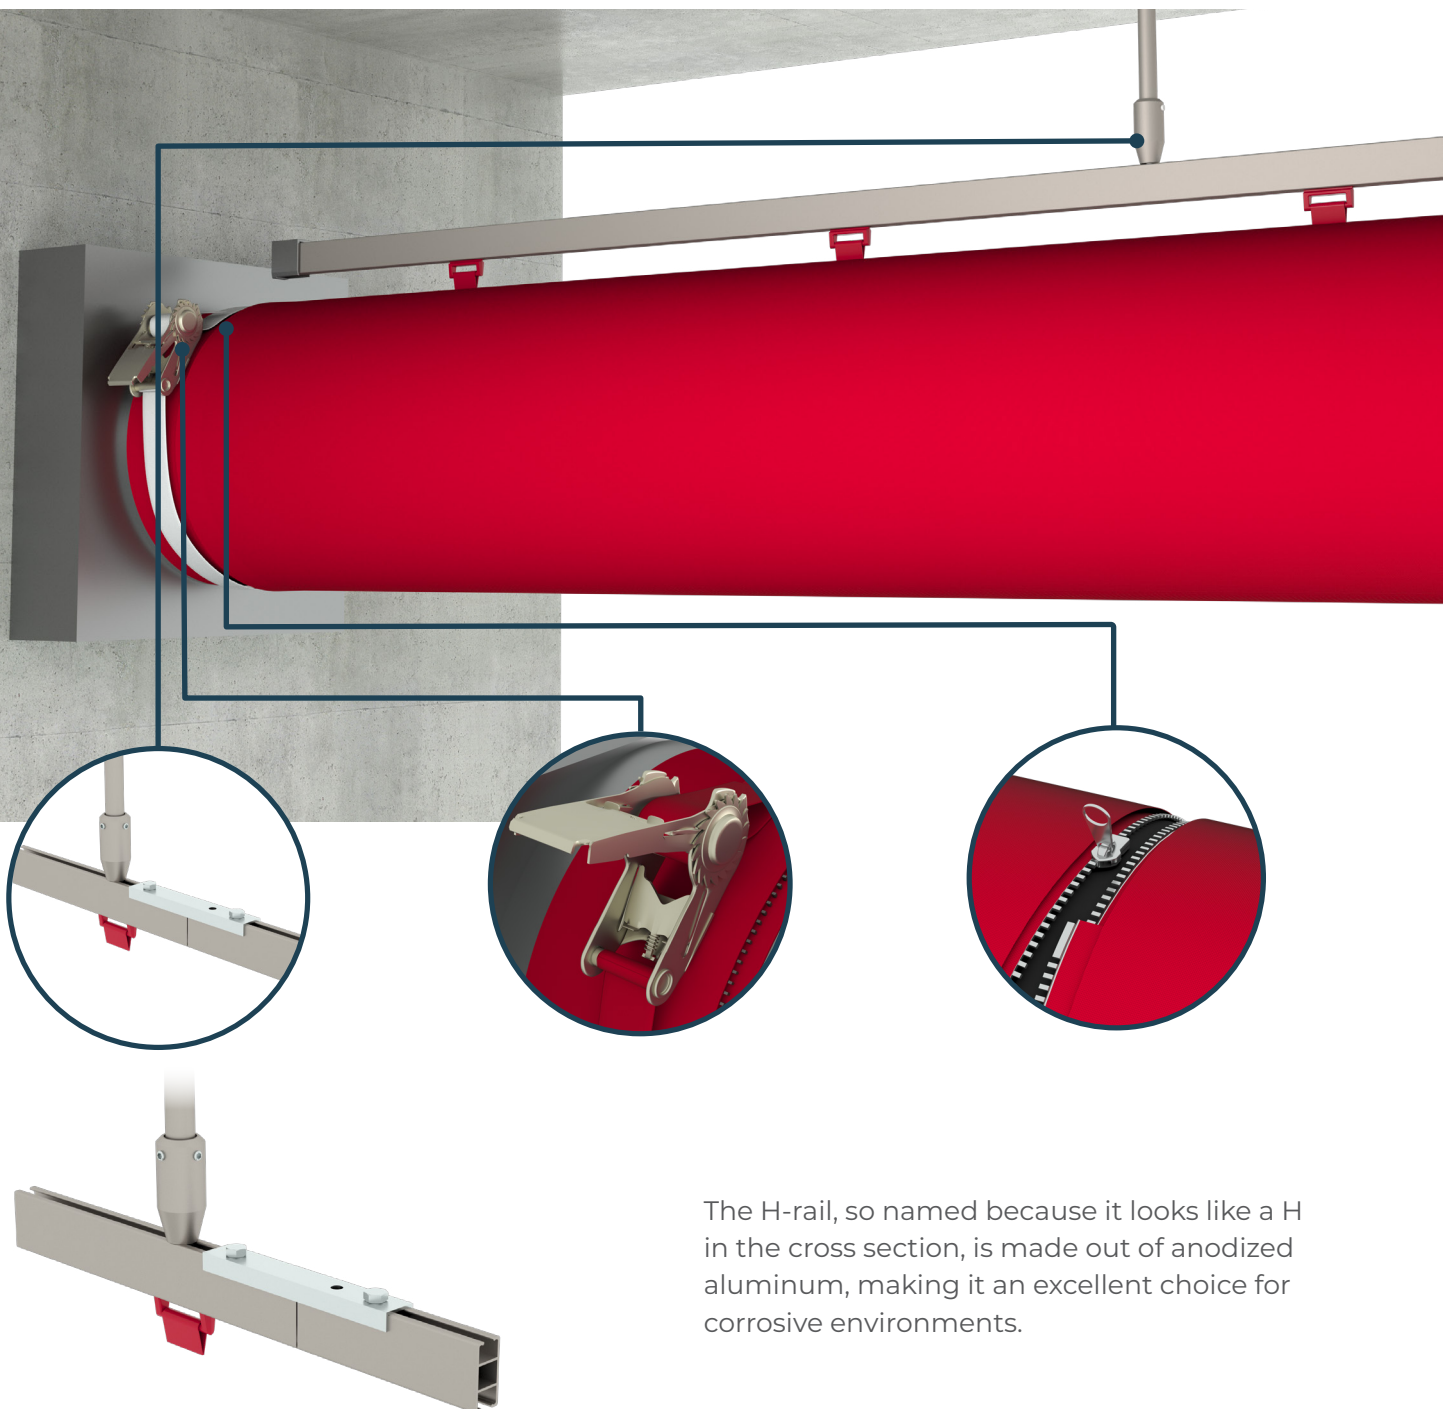




The H-rail, so named because it looks like a H in the cross section, is made out of anodized aluminum, making it an excellent choice for corrosive environments.

Example of duct system configuration

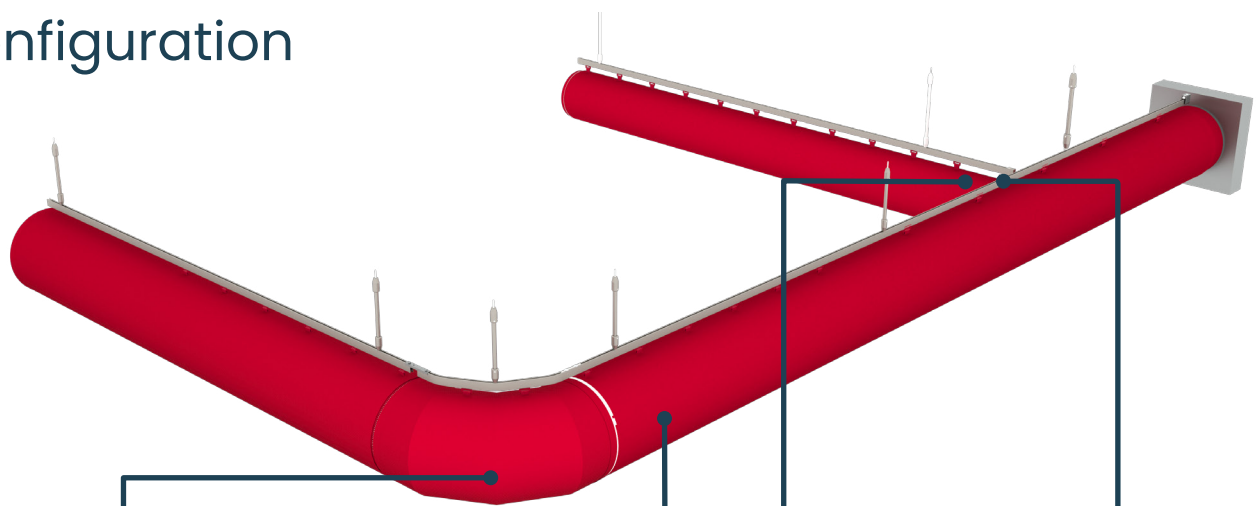




Elbows

We provide custom elbows in any degree and size.






Shape Retention

Our ducts come with your selected Shape Retention solution: All-in-One or Internal 360° Hoops. The 360° hoops are hidden inside the duct whereas All-in-One 180° hoops are sewn on the exterior. Shape retaining hardware is removable for laundering.



Reductions

Concentric and eccentric reducers are available.



Branches

Concentric and eccentric branch take-offs are available.

Options available for **Type 05**

H-RAIL for Type 05

When assembling an H-rail system the pieces of H-rail are joined together by using a metal connector that is fastened to each rail using set screws. The duct will have sliders or a bulb edge to slide into the H-rail at the appropriate locations for both single and double H-rail configurations. The rails are bent to the exact angle that is needed to suit the elbows in your FabricAir duct system.

