


SUSPENSIONS

Introduction to **Type 04**

Double T-Rail Flush Mount


- Quick and easy installation for flat ceilings
- Easy removal for frequently washed applications
- Inexpensive
- Great for larger diameters

Click or Scan




Animation

Click or Scan




Drawings

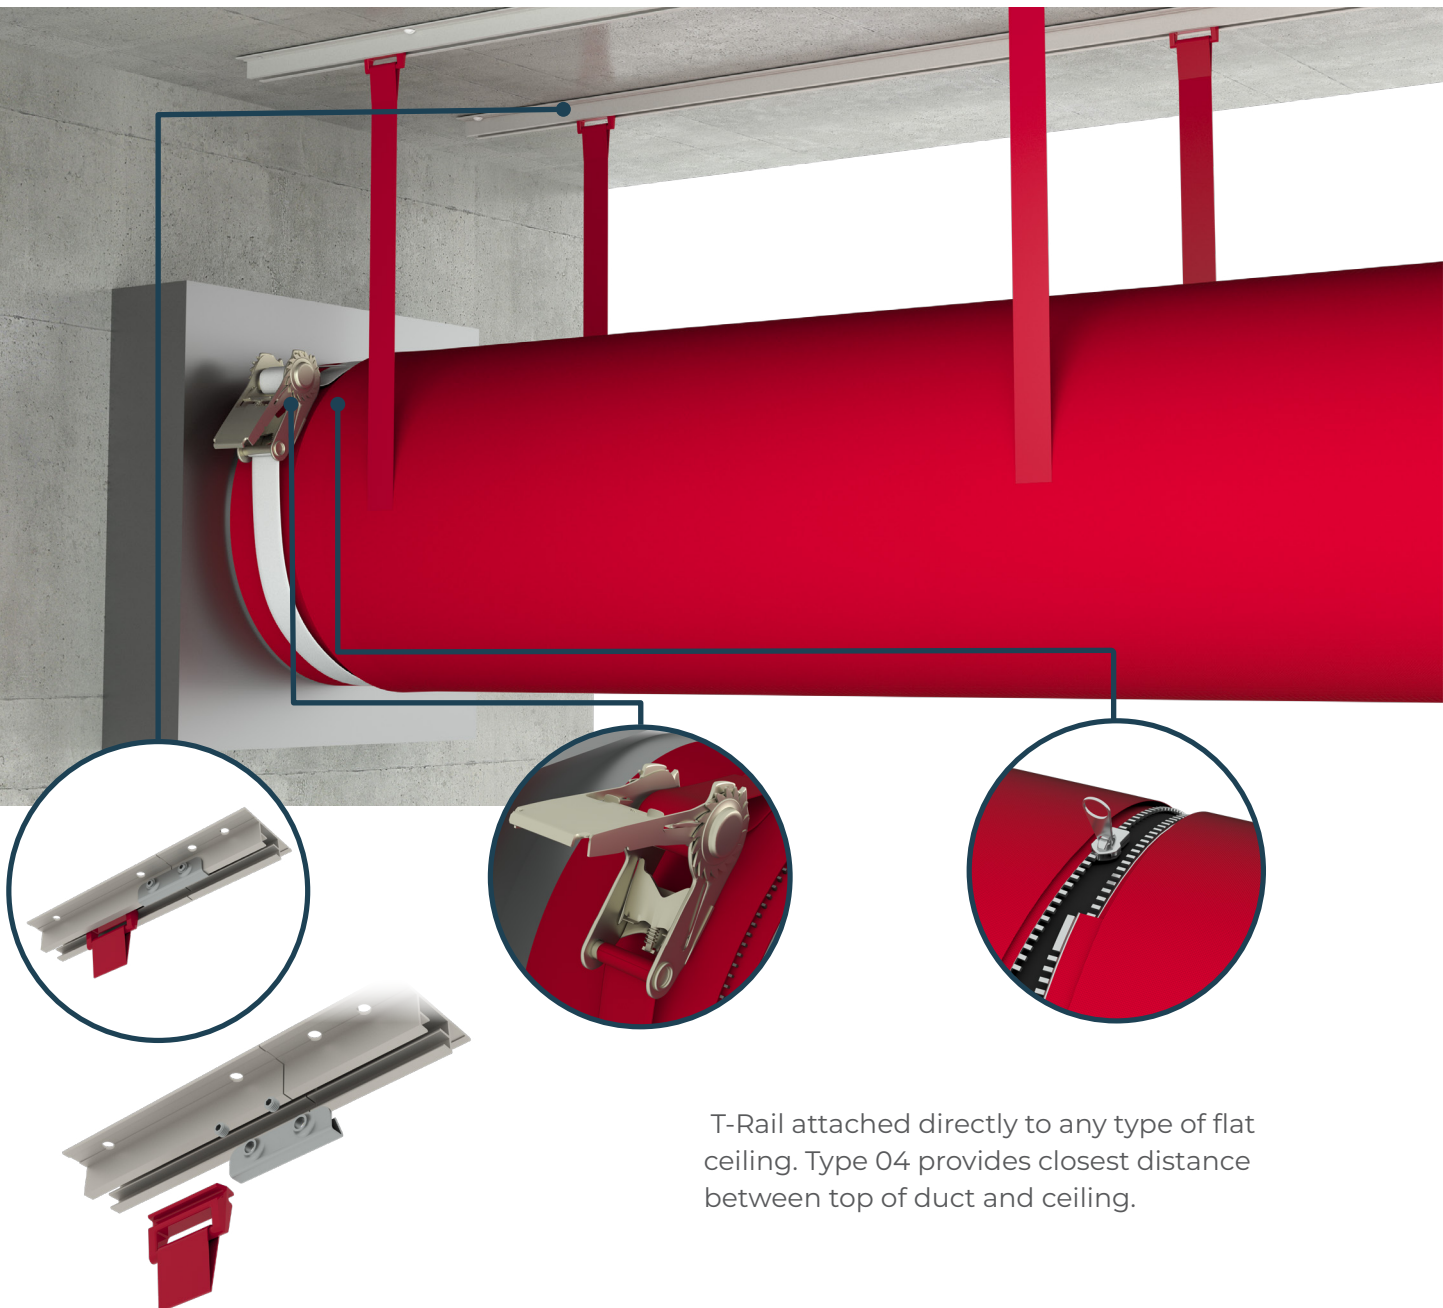


T-Rail attached directly to any type of flat ceiling. Type 04 provides closest distance between top of duct and ceiling.

Example of duct system configuration

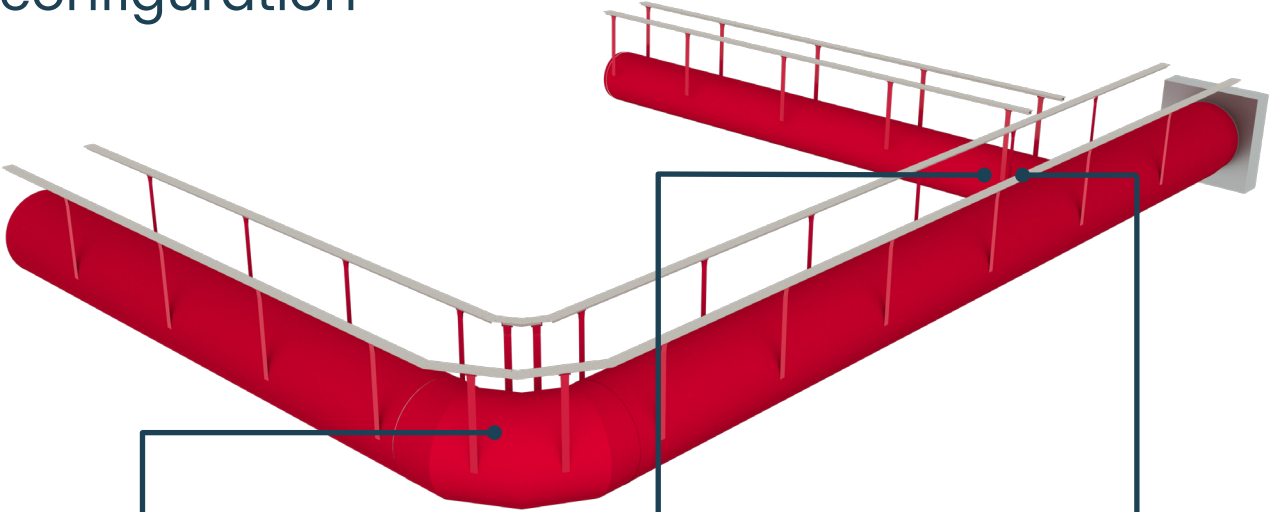




Elbows

We provide custom elbows in any degree and size.



Reductions

Concentric and eccentric reducers are available.



Branches

Concentric and eccentric branch take-offs are available.

T-RAIL for Type 04

Type 04 used to mount where ceilings are close to floor. T-rail is produced in 2 meter sections using an extrusion process and then anodized, making it an excellent choice for corrosive environments. The duct will have sliders, or a bulb edge, to slide the channel in the T-rail at the appropriate locations for both single and double T-rail configurations.

