


SUSPENSIONS



Introduction to **Type 03** Single T-Rail Flush Mount

- Quick and easy installation for regular ceilings
- Easy removal for frequently washed applications
- Inexpensive
- Shortest distance between ceiling and duct
- Plastic sliders or RapidSlider are used to fix the duct to the T-Rail

Click or Scan











Click or Scan

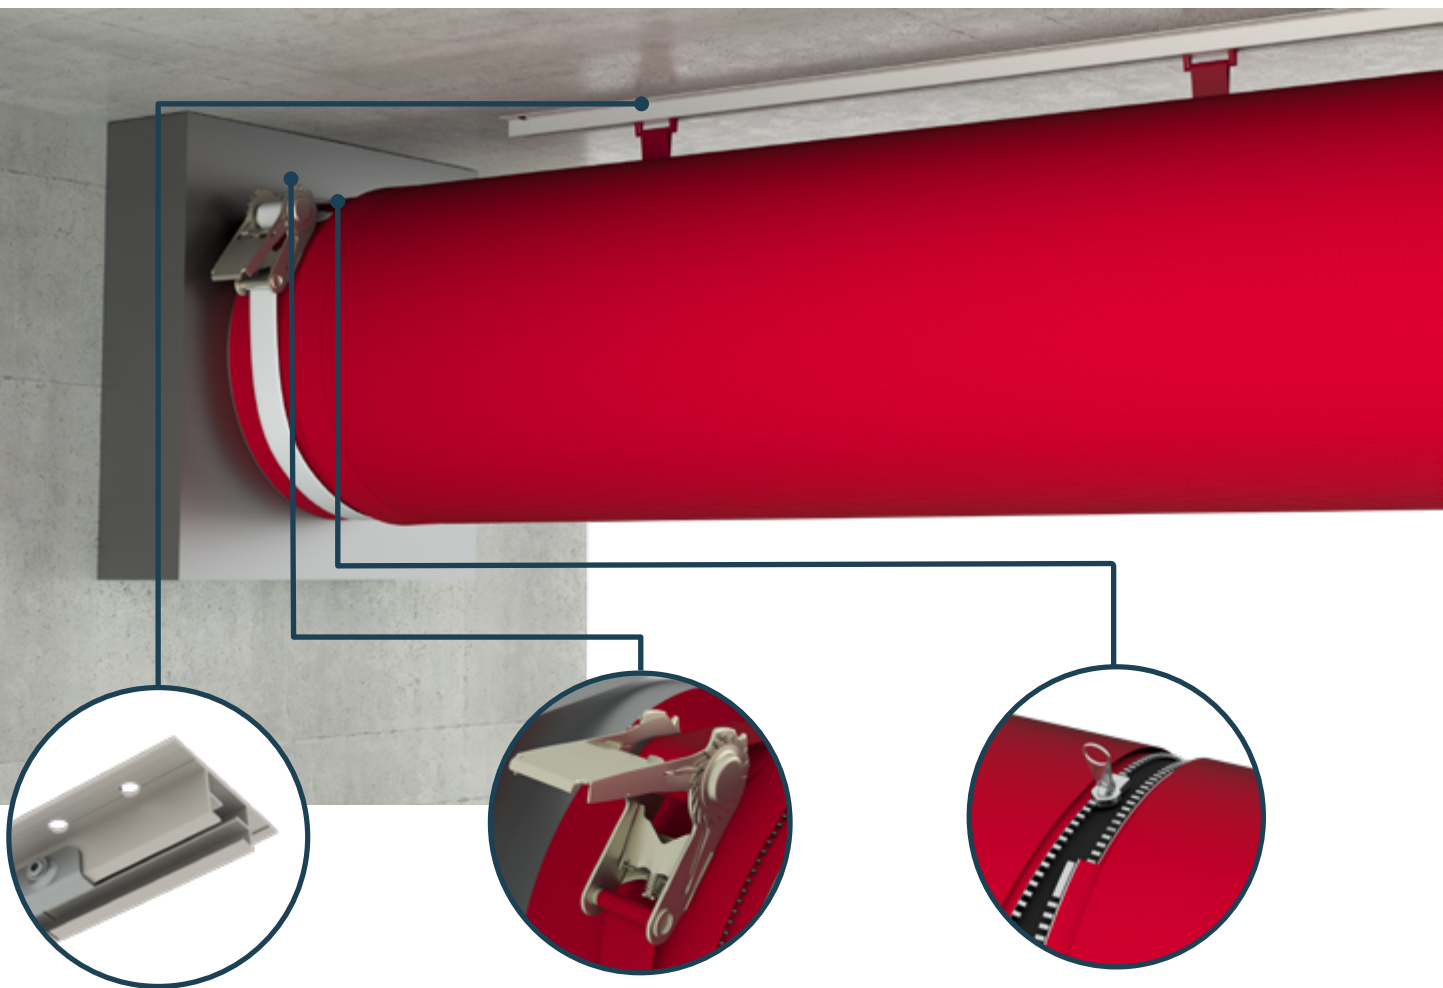

T-Rail attached directly to any type of flat ceiling. Type 03 provides closest distance between top of duct and ceiling.

Example of duct system configuration

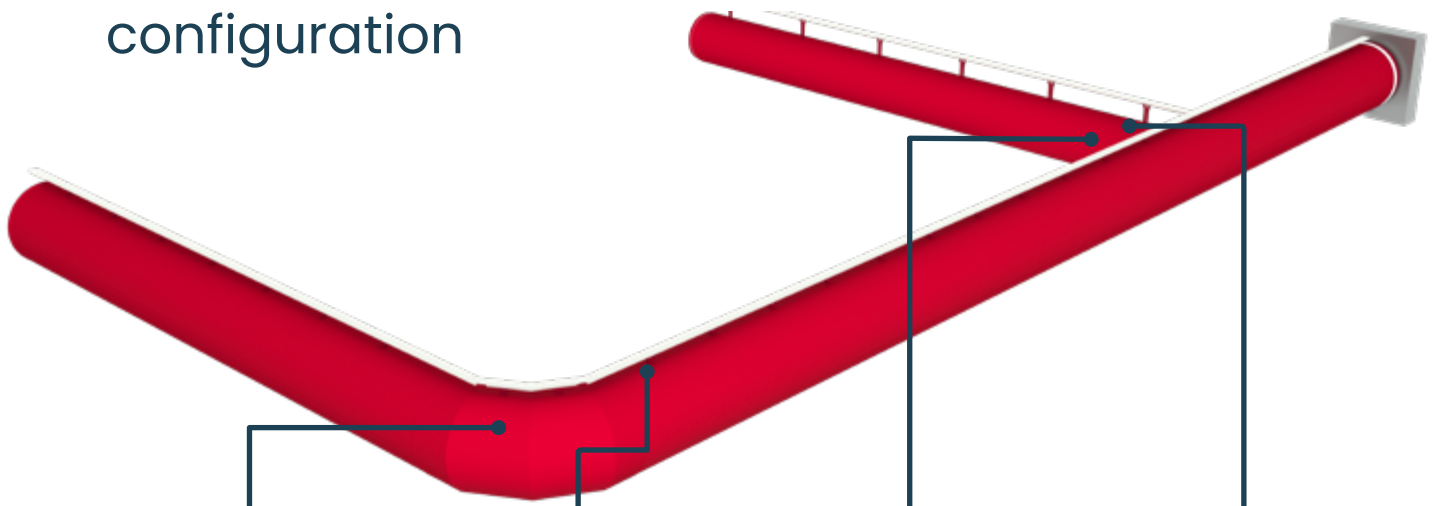

Elbows

We provide custom elbows in any degree and size.

Shape Retention

Our ducts come with your selected Shape Retention solution: All-in-One or Internal 360° Hoops. The 360° hoops are hidden inside the duct whereas All-in-One 180° hoops are sewn on the exterior. Shape retaining hardware is removable for laundering.

Reductions

Concentric and eccentric reducers are available.

Branches

Concentric and eccentric branch take-offs are available.

Options available for **Type 03**

T-RAIL for Type 03

Type 03 used to mount where ceilings are close to floor. T-rail is produced in 2 meter sections using an extrusion process and then anodized, making it an excellent choice for corrosive environments. Plastic sliders or RapidSlider are used to fix the duct to the T-rail.



Plastic sliders



RapidSlider

