

## SUSPENSIONS

### Introduction to **Type 12**


#### Double T-Rail Flush Mount for D-Shaped Ducts

- Easy removal for frequently washed applications
- Cost-effective

Click or Scan





Click or Scan

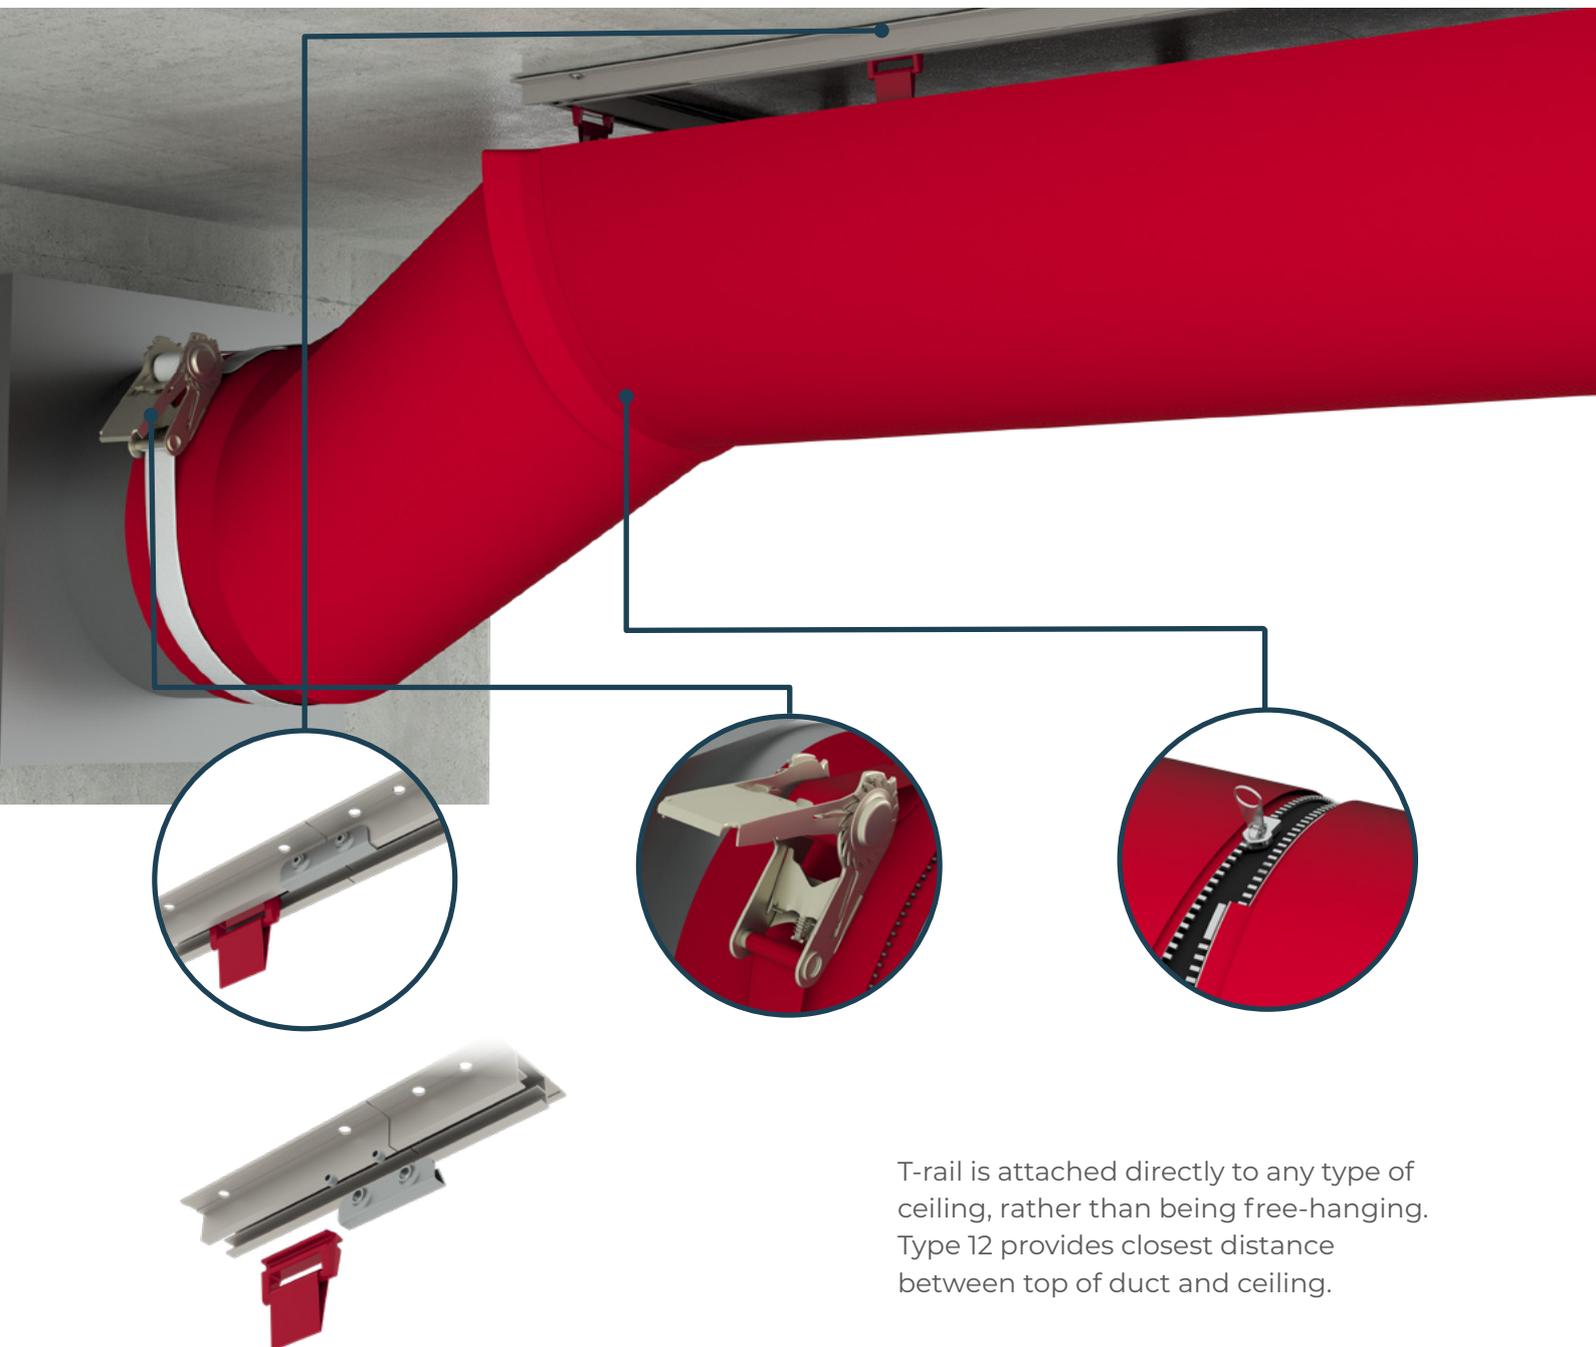


T-rail is attached directly to any type of ceiling, rather than being free-hanging. Type 12 provides closest distance between top of duct and ceiling.

# Example of duct system configuration

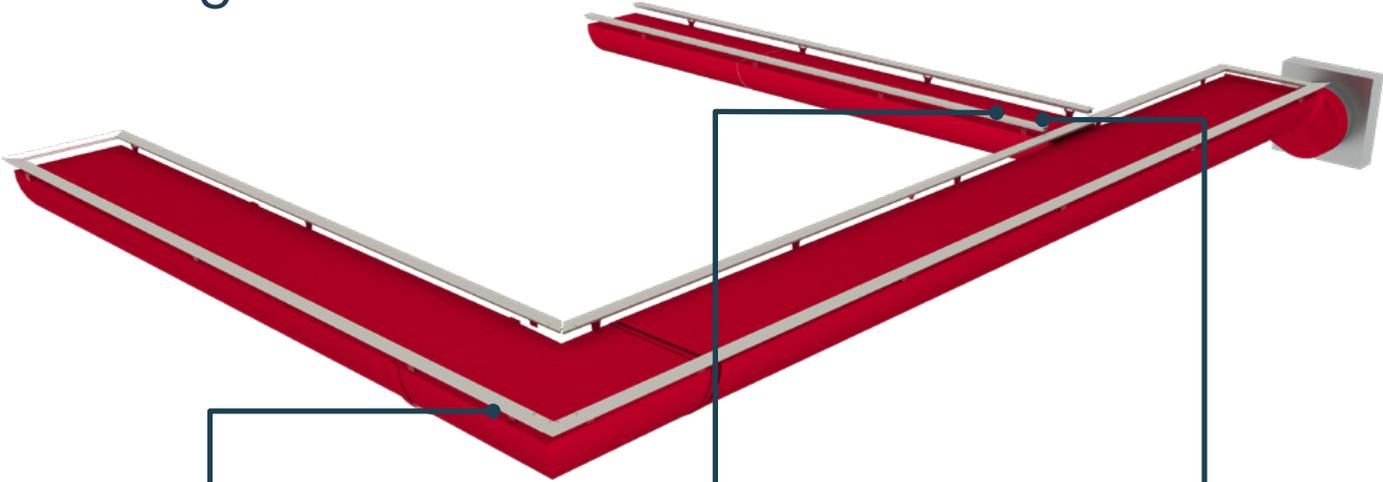


### Elbows

We provide custom elbows in any degree and size.



### Reductions

Concentric and eccentric reducers are available.



### Branches

Concentric and eccentric branch take-offs are available.

# T-RAIL for Type 12

T-rail is produced in 2 meter sections using an extrusion process and then anodized, making it an excellent choice for corrosive environments. T-rail is primarily used in a two rail configuration to suspend D-shaped and semi-oval ducts, although it can also be used to mount a round ducts. The duct will have sliders to slide the channel in the T-rail at the appropriate locations for both single and double T-rail configurations.

