

SUSPENSIONS

Introduction to **Type 06**

Double Suspended Fixed H-Rail

- Aesthetically pleasing installation
- Stable installation
- Great for larger diameters
- Plastic sliders or RapidSlider are used to fix the duct to the H-rail

Click or Scan




Animation

Click or Scan




Drawings

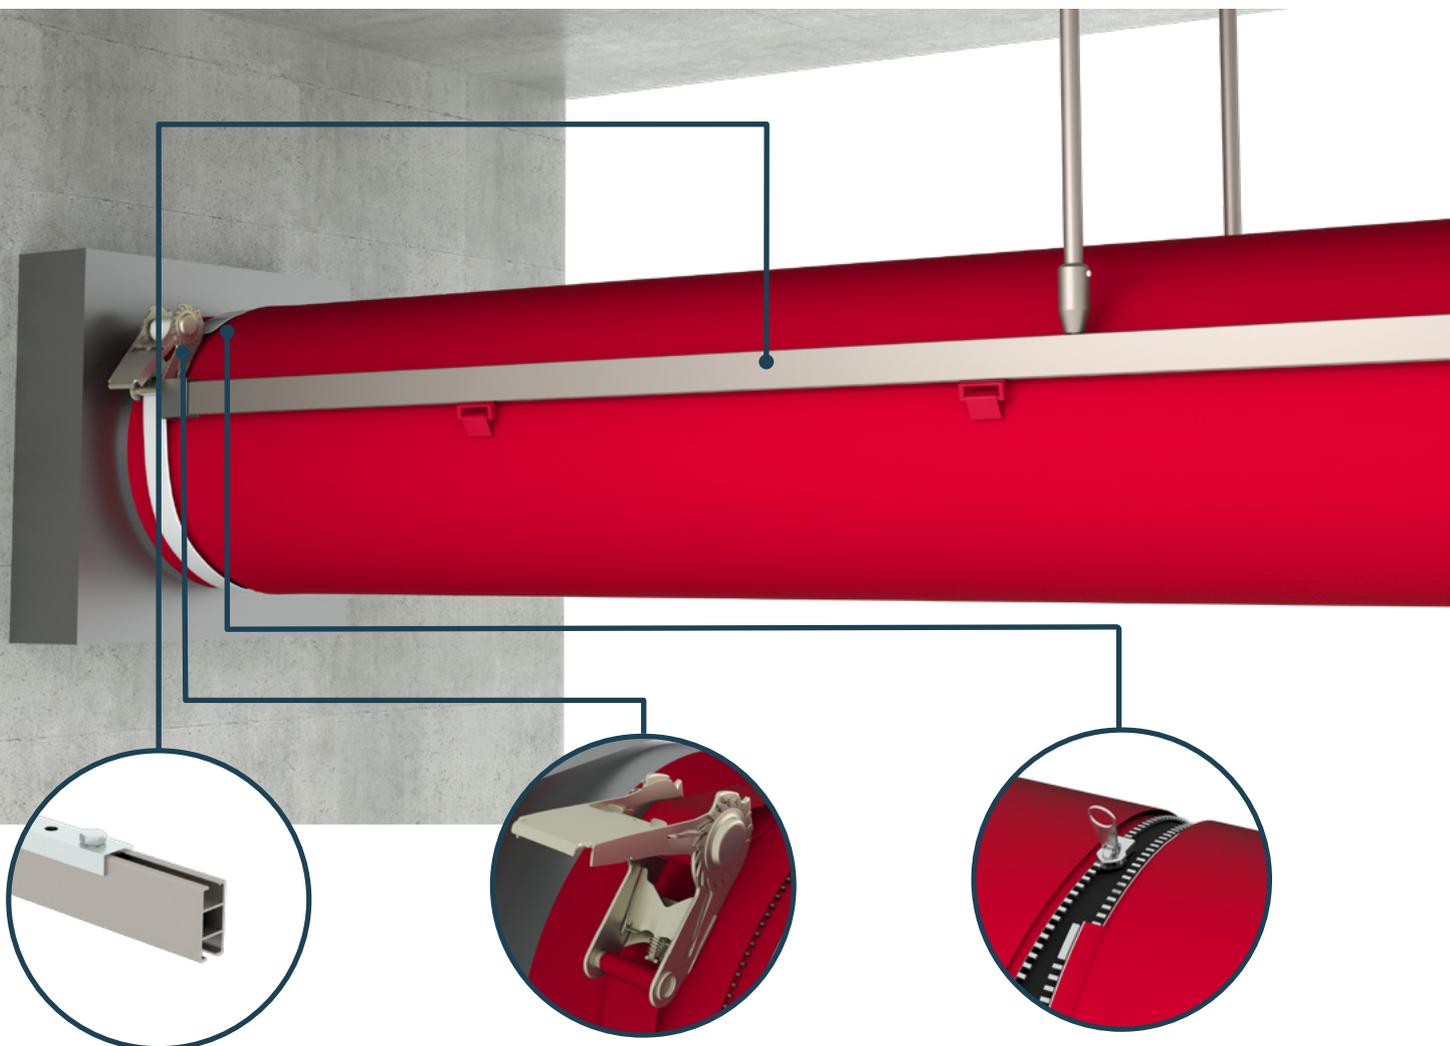




The H-rail, so named because it looks like a H in the cross section, is made out of anodized aluminum, making it an excellent choice for corrosive environments.

Example of duct system configuration

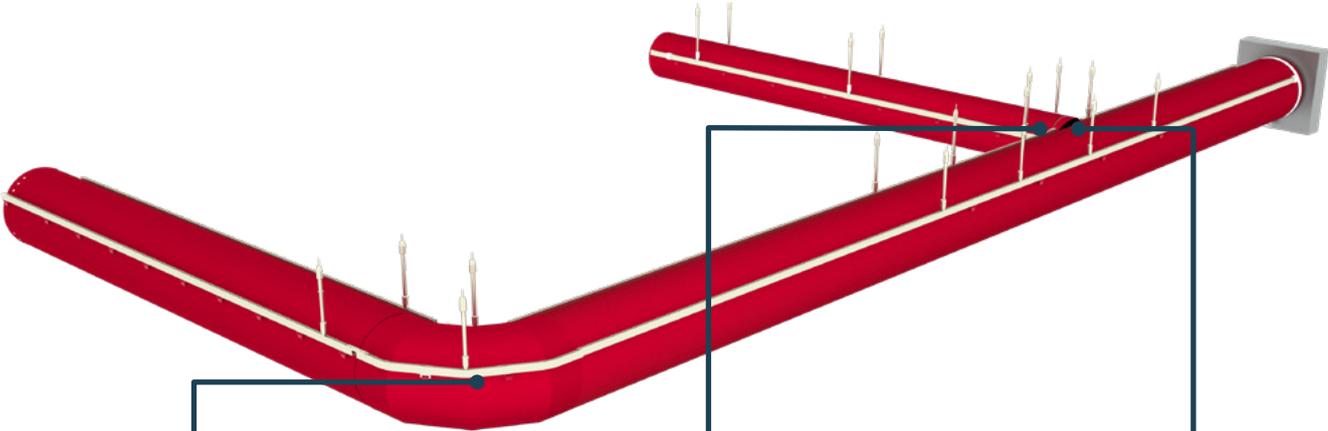



Elbows

We provide custom elbows in any degree and size.



Reductions

Concentric and eccentric reducers are available.



Branches

Concentric and eccentric branch take-offs are available.

H-RAIL for Type 06

When assembling an H-rail system the pieces of H-rail are joined together by using a metal connector that is fastened to each rail using set screws. Plastic sliders or RapidSlider are used to fix the duct to the H-rail. The rails are bent to the exact angle that is needed to suit the elbows in your FabricAir duct system.



Plastic sliders



RapidSlider

